



DYNACO
High Performance Doors

SYSTON DOORS

ESTABLISHED 1920



DYNACO D-651 ALL WEATHER

Push-Pull
gear driven technology



outside door

DYNACO D-651 ALL WEATHER

The Dynaco D-651 All Weather is specifically designed for medium sized outside applications with intensive use and subjected to extreme wind loads. It protects your facilities against wind, rain, snow, dirt and extreme temperatures.

Operating speed and perfect sealing improve your traffic flows and provide employee comfort, environmental control and savings on energy costs.


Fully self-reinserting, the Dynaco D-651 All Weather will automatically reinsert itself in its side guides when the curtain is accidentally hit.

Special features for easy installation and maintenance reduce the cost of ownership, while the small build-in dimensions allow maximum use of the available space.


The special design of the driving system and reintroduction block reduce operating noise, increasing comfort of use.

- **ULTRA HIGH SPEED OPERATION:**
Up to 3,6 m/s depending on the size
Closing speed 1,2 m/s
- **PATENTED "PUSH PULL" TECHNOLOGY:**
Unique door drive system.
- **SUPERIOR SEAL, WIND RESISTANT:**
Patented side frame assembly. No blade nor brush systems. Up to wind load class 5.
- **CRASH FORGIVING AND SELF-REINSERTING WITHOUT INTERVENTION:**
The curtain automatically reinserts itself when dislodged. No repair costs, no production down time.
- **USER SAFETY:**
Flexible curtain without rigid elements.
- **COMFORT OF USE:**
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**
Frequency driven motor and encoder for smooth operation. Wearable elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**

Easy maintenance

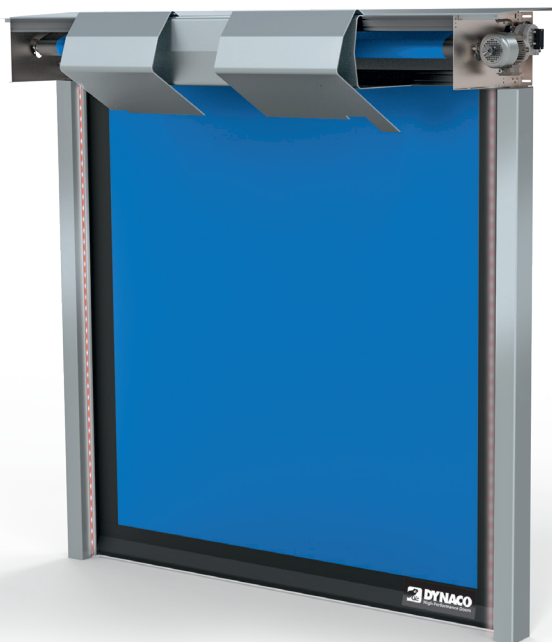

"PUSH-PULL^{PT}" Drive Technology

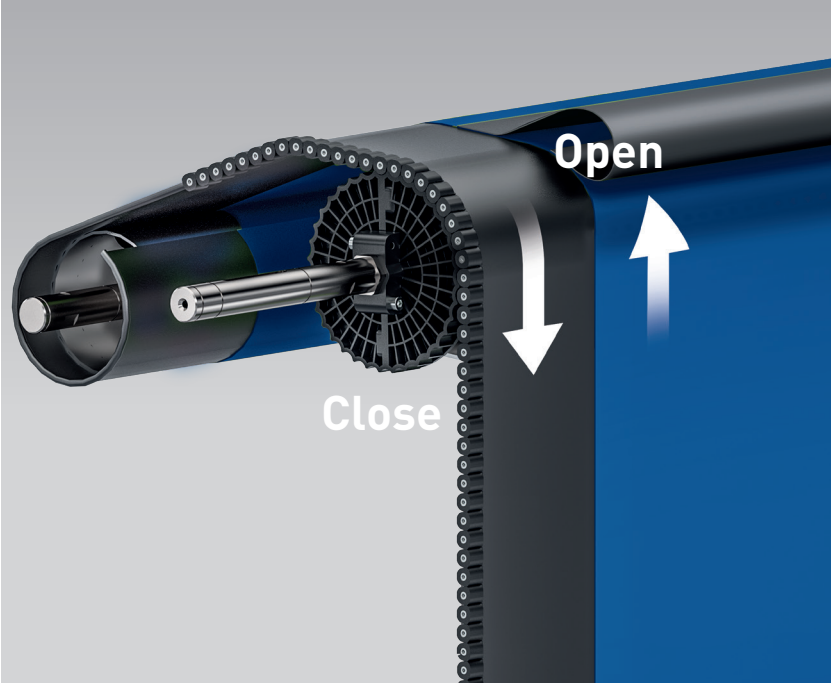



EN13241-1 STANDARDS

Standard	Ref.	Test acc.	Results
Water permeability	EN 12425	EN 12489	Class 3
Wind load	EN 12424	EN 12444	Class 4*
Wind permeability	EN 12426	EN 12427	Class 1**
Safe openings	EN 12453	EN 12445	Pass
Mechanical resistance	EN 12604	EN 12605	Pass
Unintended movements	EN 12604	EN 12605	Pass
Thermal transmittance	EN 12428	EN 12428	6,02 W/m²K
Performance (cycles)	EN 12604	EN 12605	2.000.000


* The indicated class for wind resistance applies for maximum dimensions. For doors up to W 5.000mm x H 5.500mm: Class 5

** Valid for a door of 3500 x 3500mm


CHARACTERISTICS

Max. dimensions	W 5.500 mm x H 5.500 mm
Opening speed Closing speed	Up to 3,6 m/s 1,2 m/s
Structure	Galvanised steel: 100 x 40 x 3 mm.
Drum	Steel 1 drum Ø 140 x 3 mm + 1 drum Ø 102 x 2 mm
Side guides	Reinforced polyethylene (PE-UHMW1000), with springs. Side guides reinforced over the total height.
Motor	4 poles, without brake. Power: 1,5 kW. IP rating: IP65.
Control box	DYNALOGIC provided with: Circuit breaker, general divider, adjustable timer, push button for opening and reset and emergency stop. IP rating: IP54. Frequency inverter.
Standard detectors	Infrared barrier: 300 mm from the floor. Wireless DYNACO detector (WDD).
Power supply Frequency	Single phase 230V - 16 A Frequency: 50-60 Hz
Temperature range	-15°C up to + 50°C (not for freezer applications)
Available colours comparable with:	Yellow RAL1003 Orange RAL2004 Red RAL3000 Blue RAL5002 Green RAL6005 Grey RAL7035 White RAL9010 Black RAL9005
(Actual colours may deviate. Colour samples available upon request)	


Side reinforcement

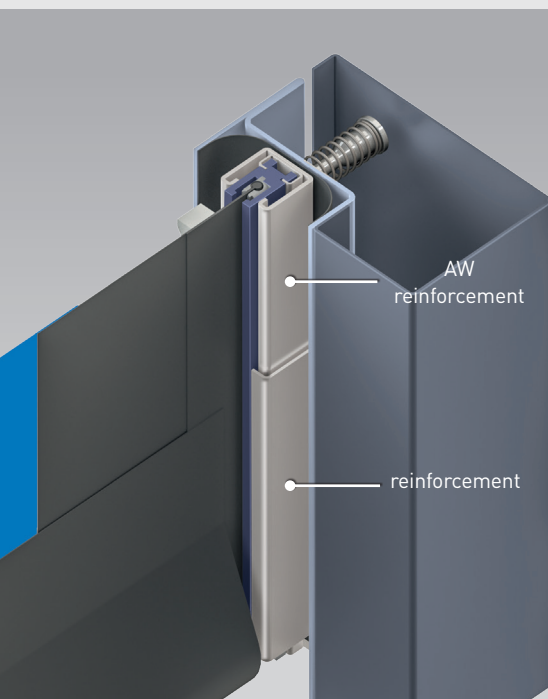

Side guide and lateral driving belt view

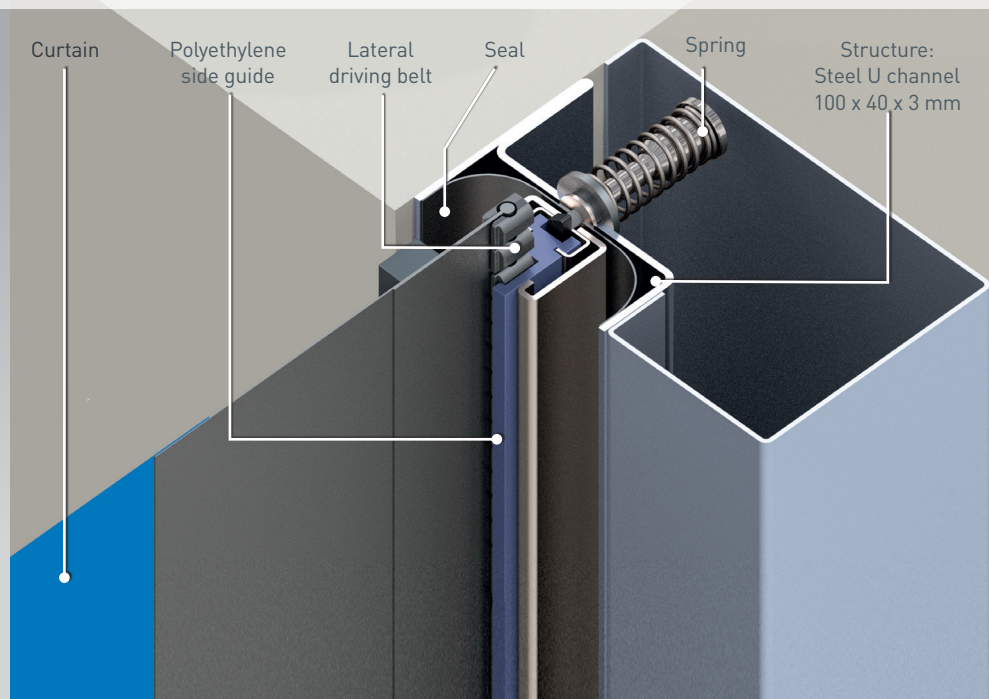

Dimensions and installation requirements Dynaco D-651 All Weather

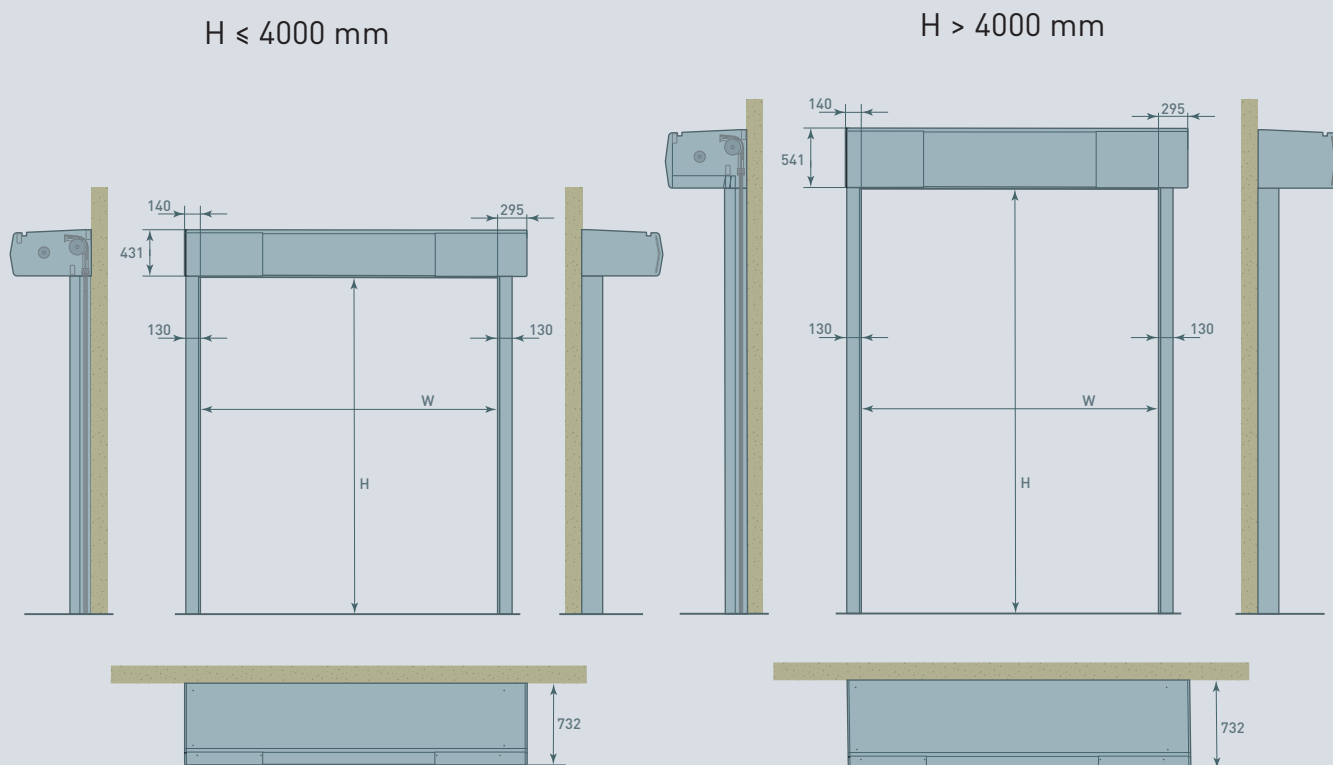

All indicated dimensions are net: the space necessary for mounting and maintenance has to be provided.

REMARK: Based on the risk analysis of the environment, extra push buttons, detectors and covers might be required.



SYSTON ROLLING SHUTTERS LTD. trading as

SYSTON DOORS

ESTABLISHED 1920

1499 Melton Road | Queniborough | Leicester LE7 3FP

T (0116) 260 8841 | E sales@syston.com | www.syston.com

SUPPLYING AND INSTALLING **DYNACO** DOORS SINCE 1990
WE ALSO SERVICE & REPAIR EXISTING **DYNACO** DOORS